











PRODUCT DESCRIPTION

Introducing our newest EZ Tube Display, the EZ Tower! This display is very light-weight and is an excellent attention grabber due to its sheer size. The aluminum frame is completely tool free and easily assembled by snapping all of the individual tubes together. The graphic slides over the frame, pulled down until taut, and then is zipped closed. A durable case with wheels for easy transport is included. Grab all the attention at your next show with this massive display!

DISPLAY DIMENSIONS 36"W x 96"H x 3

GRAPHIC SIZE 36"W x 96"H (4 prints total)

GRAPHIC MATERIAL

Stretch Fabric

GRAPHIC FINISHING

Dye Sublimation with Pillowcase Finishing

DISPLAY CONSTRUCTION

Aluminum Frame (38mm diameter tubing)

SHIPPING WEIGHTS & DIMENSIONS

Shipping Weight	32 lbs (stand only)
	39 lbs (frame and graphic)

Shipping Dimensions 56.75"L x 13"W x 5.5"H

LARGE QUANTITY FREIGHT

Freight Shipping	20 boxes per 48"L x 40"W x 32.5"H skid

Freight Weight 685 lbs (frame only) 825 lbs (frame & graphic)

GRAPHIC TURN AROUND TIME

2 business days after proof approval

AVAILABILITY | CA




Silverbag Case






1.5" (38mm) dia. Frame Tubing

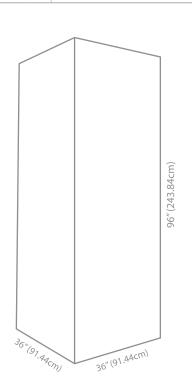

PARTS LIST



Qty.4 - Vertical Sectional Tubing



Qty.12 - Horizontal Tubing



Qty.8 - Angle Connector




Qty.1 - Silverbag

SETUP INSTRUCTIONS

A. Vertical Tubing





The vertical tubes are multi-piece units, connected with an internal bungee cord. Push down on the button and insert into the receiving tube until the button snaps in place.

B. Corner / Angle Connectors






Connect the corner/angle connectors at both ends of each vertical tube. Match the labels, located on the ends of every piece (ex:B1:B1,B8:B8,etc.).

C. Horizontal Tube





Connect the horizontal tubes to the remaining open ends of each corner/angle connector. Match the labels, located at each end. The frame setup is complete.

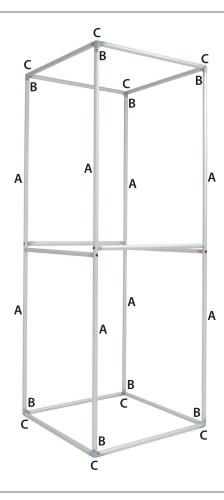



1. Drape



Drape the top of the frame, starting with the open end (bottom) of the graphic.

2. Pull



Pull the graphic all the way down until taut.

3. Zip





Zip the bottom shut to maximize tension. The graphic install is complete.